
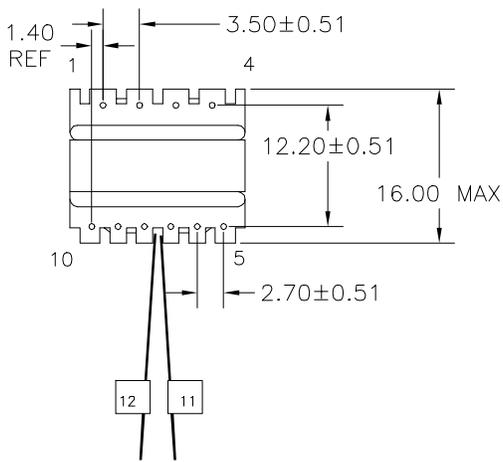
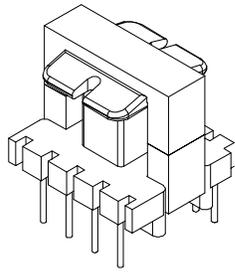



1 2 3 4 5 6

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

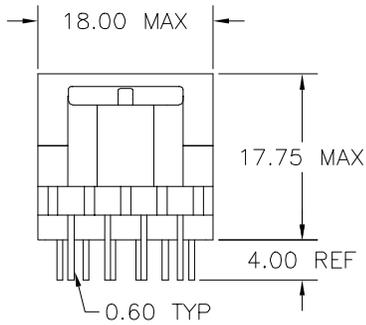

120-400V
@ 60KHZ
50% DC

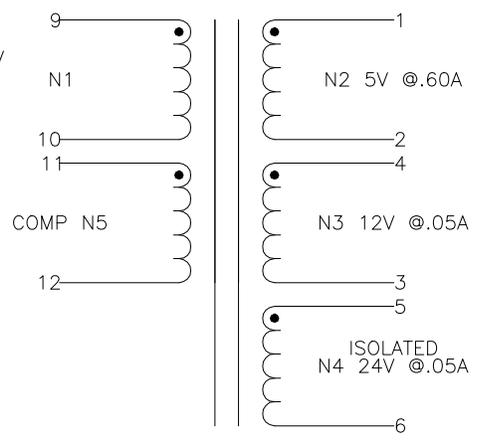

NOTE:
POLARITY SHOWN IS FOR THE
TRANSFORMER. FOR CORRECT
FLYBACK OPERATION CONNECT
B+ TO PIN 10.

ELECTRICAL SPECIFICATIONS

- L @ 1kHz 10mA - (9-10) 3.25mH ±10%
- LL @ 100kHz 10mA - (9-10) 69µH TYP, TOL TBD
(WITH 1-6,11,12 SHORTED)
- URNS RATIO - ±3%
 - N1:N2 - 1:0.044
 - N1:N3 - 1:0.106
 - N1:N4 - 1:0.189
 - N1:N5 - 1:0.111
- DCR - OHMS TYP, TOL TBD
 - N1 - 4.26
 - N2 - 0.035
 - N3 - 0.212
 - N4 - 0.643
 - N5 - 0.280
- HIPOT - 3000VAC 1SEC
N4 TO N1,N2,N3

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	12/18/03	544-DATE CODE VP11-049	TOP OF CORE	
			DESCRIPTION	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			5V & 12V 6VA ISO 24 XFMR		
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-049	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 12/18/03	CRAMER PART NUMBER CVP 11-049
			APPD. MJA	DATE 12/19/03	

1 2 3 4 5 6