

CSM 13SM

Power Rating: 3VA⁽¹⁾⁽²⁾


PLATFORM  **PARAMETERS**

Core Size:	EF 12.6
Core Area:	0.13cm ²
Path Length:	2.96cm
Core Volume:	0.386cm ³
Winding Area:	0.145cm ²


Samples Available on Request

techsales@cramercoil.com
(262) 268-2150 (Inside Sales)
(262) 268-4100 (FAX)

SUGGESTED PCB LAYOUT⁽³⁾

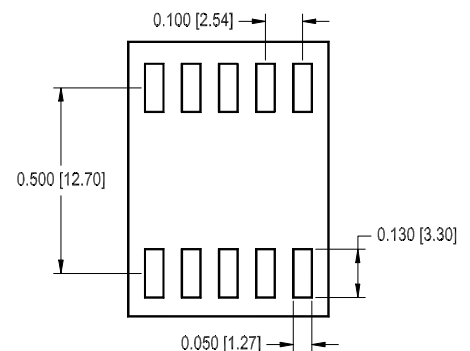

Note:
Unless otherwise specified, tolerances are
x.xxx = 0.003 [0.08]

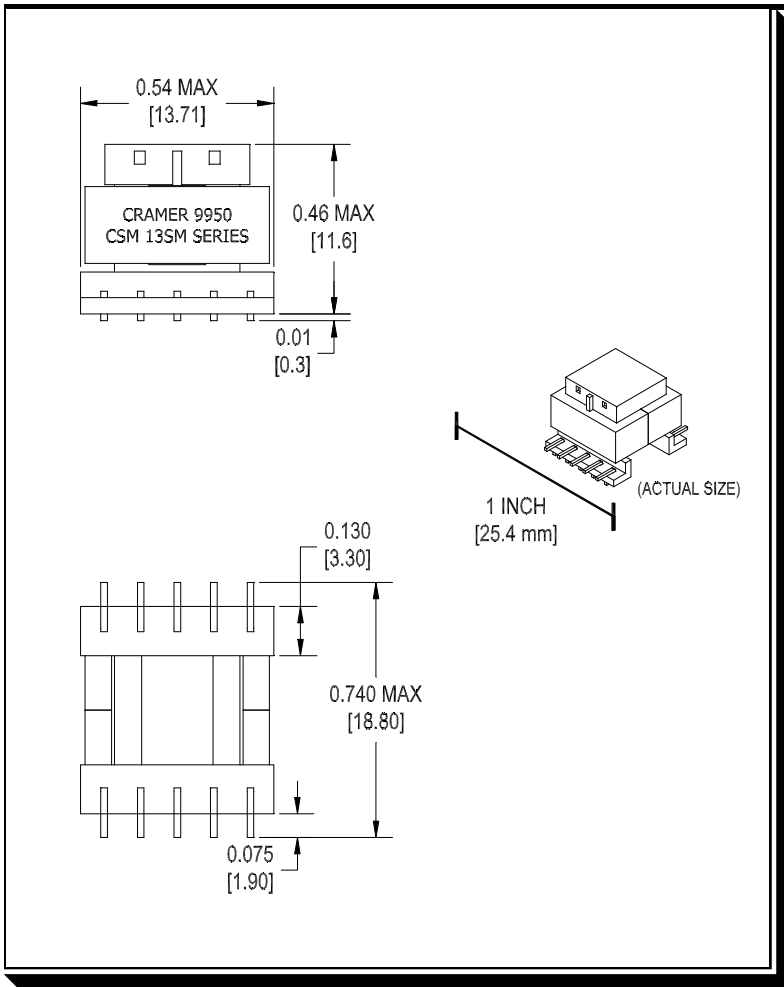

Notes:
Dimensions: inches [millimeters] (entire page)

Platform Features

- * Utilizes Economical, Efficient Construction Materials
- * Industry Standard Footprint
- * Power Rating up to 3VA⁽¹⁾⁽²⁾
- * UL and CSA Compatible
- * For High Isolation Applications, Standard Platform Provides up to 2 Isolated Secondaries or 4 Common Secondaries
- * Up to 1,600 VRMS Isolation (standard configuration) between Windings
- * Lead Time 2 to 6 Weeks

(1) 3VA at 100kHz Uni-polar, 7VA at 100kHz Bi-polar.
(2) Energy Storage Limit: 100 Micro-joules (0.5 LI²).
(3) Final responsibility for the correct PCB layout resides with the user.