



1 2 3 4 5 6

A

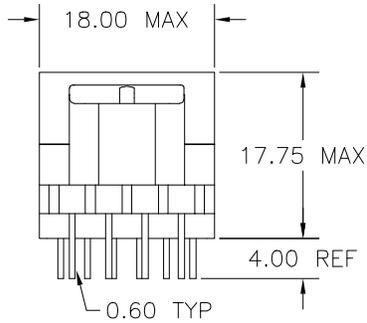


B

100-400V
@ 60KHZ
50% DC

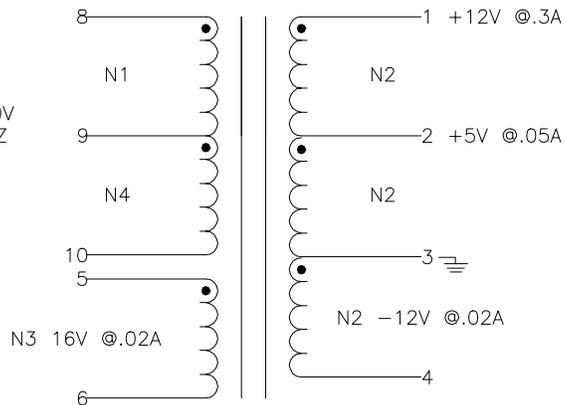

A

C

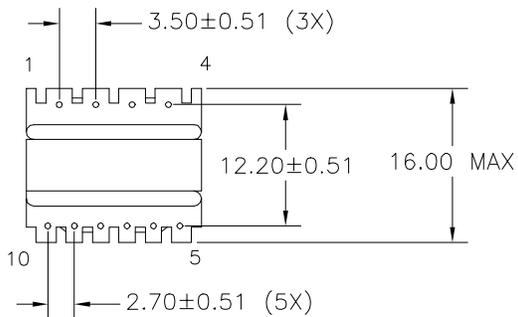

B

D

NOTE:
POLARITY SHOWN IS FOR THE
TRANSFORMER. FOR CORRECT
FLYBACK OPERATION CONNECT
B+ TO PIN 10.

C

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 4.78mH ±10%

LL @ 100kHz 10mA - (8-10) 48.5µH MAX
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

- 8-9:1-2 - 1:0.12
- 8-9:2-3 - 1:0.09
- 8-9:3-4 - 1:0.19
- 8-9:5-6 - 1:0.28
- 8-9:9-10 - 1:1

DCR - OHMS MAX

- 8-10 - 8.65
- 1-4 - 0.459
- 5-6 - 1.29

HIPOT - 4000VAC 1SEC

5-10 TO 1-4

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

D

H

REVISION		DATE	MARKINGS	LOCATION
O	PRELIMINARY	10/27/04	544-DATE CODE VP11-058	TOP OF CORE
A	RELEASED	11/03/04	DESCRIPTION MULTIPLE OUTPUT FLYBACK	<div style="border: 1px solid black; padding: 5px;"> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°</p> <p>PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY</p> </div>
B	3-4 TURNS RATIO WAS 0.21 UPDATED DCR'S	11/18/04	CUSTOMER	
C	PILOT REVISIONS PER ECO#005292	02/18/05		
			G:\DATA\SPECS\ENG\CVP\11-058	CUSTOMER PART NUMBER
			DR. NJW	DATE 10/27/04
			APPD. JDB	DATE 11/03/04
				CRAMER PART NUMBER CVP 11-058
				REV C

E

F

F

G

G

H

H

I

I

J

J

1 2 3 4 5 6