

1

2




3

4

5


6

A

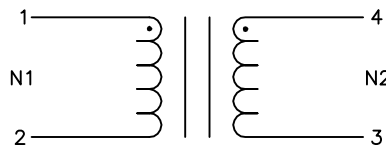


B

C

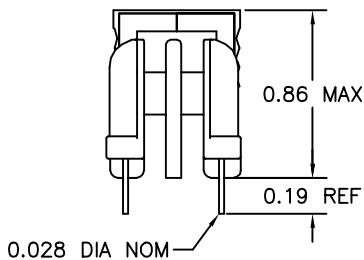

D



E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (1-2) 300μH MIN

LL @ 100kHz 10mA - (1-2) 5μH MIN
(WITH 3&4 SHORTED)

TURNS RATIO - ±3%
N1:N2 - 1:1

DCR - OHMS TYP, TOL TBD
N1 - 0.026
N2 - 0.026

HIPOT - 2500VAC 1MIN OR 3000VAC 1SEC
N1 TO N2

F

G

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	12/19/02	544-EIA DATE CODE CC 125-003	TOP OF CLIP	
			DESCRIPTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	PROPRIETARY INFORMATION
			2.5 AMP 360 MICROHENRY C.M. CHOKE	2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CC\125-003	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 12/19/02	
			APPD. JDB	DATE 01/06/03	
				CRAMER PART NUMBER CC 125-003	REV A

J

1

2

3

4

5

6

A

B

C

D

E

F

G

H

I

J