


1 2 3 4 5 6

A

A


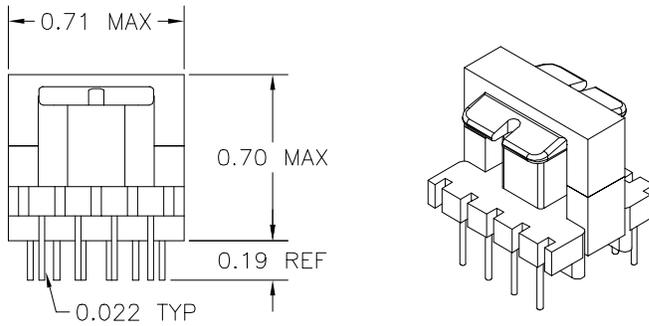


B

B

C

C

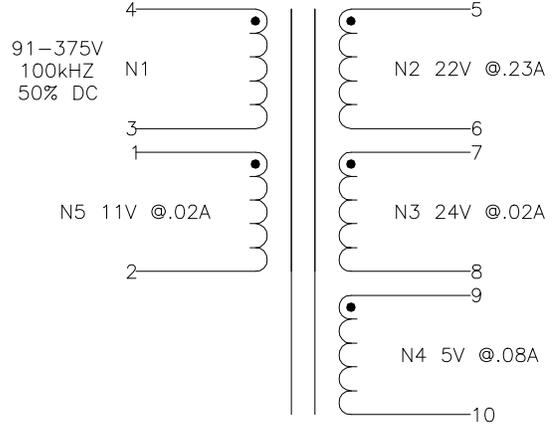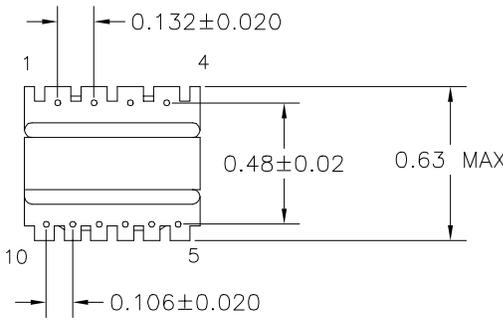

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (4-3) 1.3mH ±10%  
 LL @ 100kHz 10mA - (4-3) 31µH TYP, TOL TBD  
 (WITH 1,2,5-10 SHORTED)

URNS RATIO - ±3%  
 4-3:5-6 - 1:0.253  
 4-3:7-8 - 1:0.274  
 4-3:9-10 - 1:0.074  
 4-3:1-2 - 1:0.126

DCR - OHMS TYP, TOL TBD  
 1-2 - 0.394  
 3-4 - 2.17  
 5-6 - 0.255  
 7-8 - 0.769  
 9-10 - 0.235

HIPOT - 1500VAC 1MIN OR 1800VAC 1SEC  
 N1,N5 TO N2,N3,N4

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	09/26/00	544-DATE CODE VP11-004	TOP OF CORE	
B	ADDED VOLTAGES TO SCHEMATIC	07/30/01	DESCRIPTION 6 VA VIPER FLYBACK XFMR (GENIE)	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	UPDATED PIN TO PIN & HEIGHT DIMENSIONS	06/26/03	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-004	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 09/26/00	
			APPD. JDB	DATE 09/26/00	
				CRAMER PART NUMBER CVP 11-004	REV C

J

J

1 2 3 4 5 6