
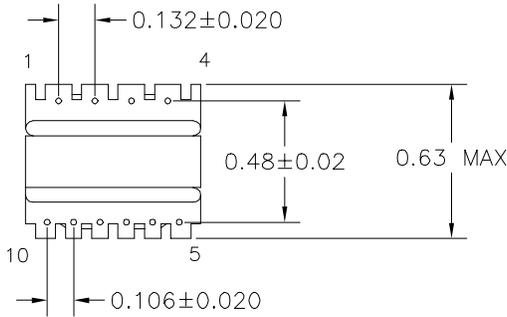


120/375
@ 50KHZ
50%DC

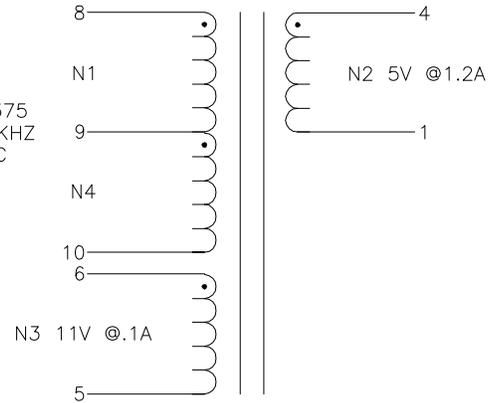

NOTE:
POLARITY SHOWN IS FOR THE
TRANSFORMER. FOR CORRECT
FLYBACK OPERATION CONNECT
B+ TO PIN 10.

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.4mH ±10%

LL @ 100kHz 10mA - (8-10) 51µH TYP, TOL TBD
(WITH 1,4-6 SHORTED)

URNS RATIO - ±3%
N1/N4:N2 - 1:0.049
N1/N4:N3 - 1:0.108

DCR - OHMS TYP, TOL TBD
N1/N4 - 5.0
N2 - 0.030
N3 - 0.592

HIPOT - 3750VAC 1SEC
N1/N4,N3 TO N2

REVISION		DATE	MARKINGS	LOCATION	
0	PRELIMINARY	10/25/00	544-EIA DATE CODE VP11-006	TOP OF CORE	
A	RELEASED	10/27/00	DESCRIPTION 7.8 VA VIPER FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
B	UPDATED PIN TO PIN & HEIGHT DIMENSIONS	06/26/03	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-006	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 10/25/00	
			APPD. JDB	DATE 10/30/00	
				CRAMER PART NUMBER CVP 11-006	REV B