



1 2 3 4 5 6

A

A




B

B

C


C

100-375
60KHZ
50%DC

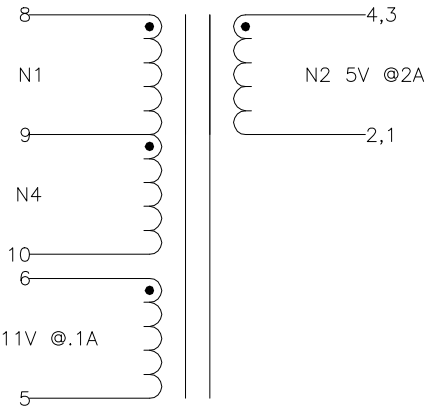

D

D

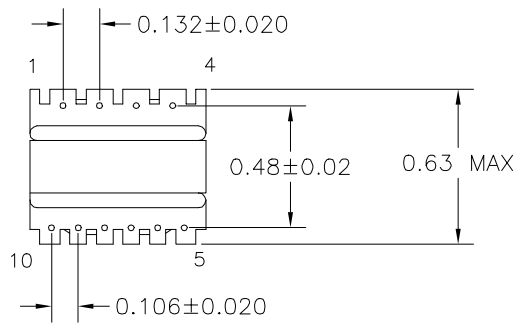

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 1.26mH ±10%

LL @ 100kHz 10mA - (8-10) 23.3µH TYP, TOL TBD
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.054

N1/N4:N3 - 1:0.131

DCR - OHMS TYP, TOL TBD

N1/N4 - 2.82

N2 - 0.015

N3 - 0.417

HIPOT - 4000VAC 1SEC

N1,N3,N4 TO N2

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	02/12/02	544-EIA DATE CODE VP11-019	TOP OF CORE	
B	UPDATED PIN TO PIN & HEIGHT DIMENSIONS	06/27/03	DESCRIPTION 12 VA VIPER FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-019	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 02/12/02	CRAMER PART NUMBER CVP 11-019
			APPD. JDB	DATE 02/14/02	

1 2 3 4 5 6

J

J