
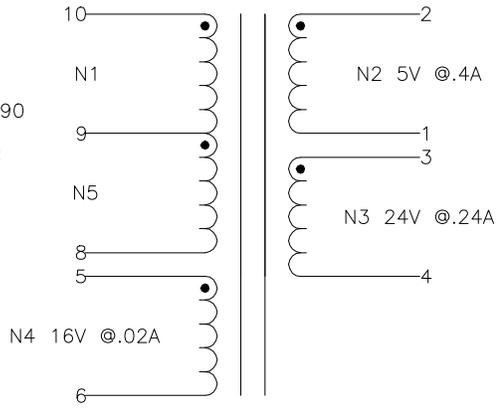



1 2 3 4 5 6

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

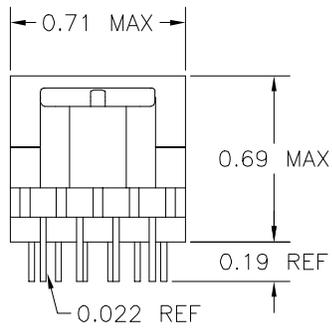

100-390
60KHZ
50%DC

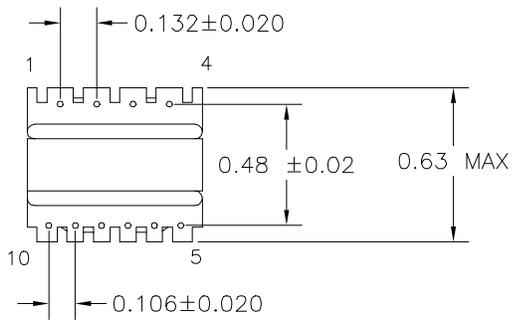

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (10-8) 1.8mH ±10%
 LL @ 100kHz 10mA - (10-8) 33µH MAX
 (WITH 1-6 SHORTED)
 TURNS RATIO - ±3%
 N1/N5:N2 - 1:0.062
 N1/N5:N3 - 1:0.254
 N1/N5:N4 - 1:0.146
 DCR - OHMS MAX
 N1/N5 - 4.06
 N2 - 0.095
 N3 - 0.411
 N4 - 0.664
 HIPOT - 4000VAC 1SEC
 N1,N4,N5 TO N2,N3

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	03/27/02	544-EIA DATE CODE VP11-020	TOP OF CORE	
B	ADDED CUSTOMER P/N	05/21/02	DESCRIPTION 8.4 VA VIPER FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	N4 RATIO WAS 0.169	08/08/02	CUSTOMER		
D	ASSIGN LL & DCR TOLERANCES	10/18/02			
E	UPDATE PIN TO PIN DIMENSIONS PER ECO#004751	06/26/03			
			G:\DATA\SPECS\ENG\CVP\11-020	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 03/27/02	22-6217-0014
			APPD. JDB	DATE 03/28/02	CRAMER PART NUMBER CVP 11-020
					REV E

1 2 3 4 5 6