
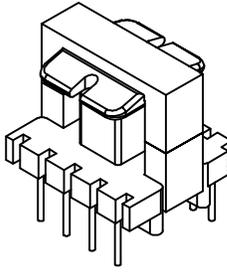



1 2 3 4 5 6

A

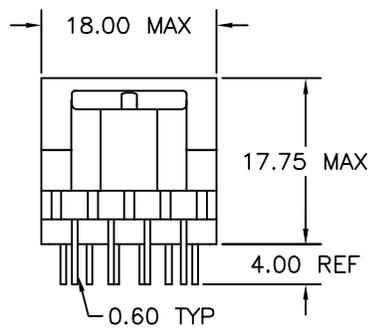


B

C

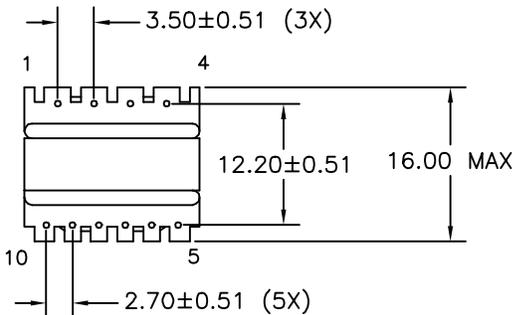

120-400V
 @ 60KHZ
 50% DC

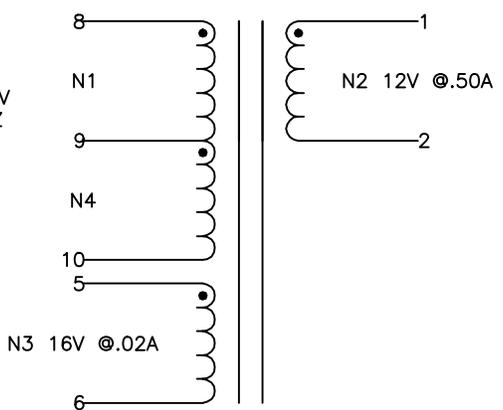

D

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%
 LL @ 100kHz 10mA - (8-10) 60µH MAX
 (WITH 1-6 SHORTED)

TURN RATIO - ±3%
 N1/N4:N2 - 1:0.106
 N1/N4:N3 - 1:0.144

DCR - OHMS MAX
 N1/N4 - 6.90
 N2 - 0.113
 N3 - 1.04

HIPOT - 4000VAC 1SEC
 N1,N3,N4 TO N2

NOTE:
 MEETS CONSTRUCTION FOR:
 UL 1310, 1950, 1411
 EN60950

H

REVISION		DATE	MARKINGS	LOCATION	
O	PRELIMINARY	05/09/02	544-EIA DATE CODE VP11-021	TOP OF CORE	
A	RELEASED	05/13/02	DESCRIPTION 12V 6VA VIPER 12A XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
B	REMOVED 61558 STANDARD, HEIGHT WAS 0.69 MAX	03/11/03	CUSTOMER		
C	ASSIGN LL AND DCR TOLERANCES PER ECO#004711	06/09/03			
D	ASSIGN NEW LL MAX PER ECO#004726	06/17/03	G:\DATA\SPECS\ENG\CVP\11-021	CUSTOMER PART NUMBER	REV
E	UPDATE PIN TO PIN DIMENSIONS PER ECO#004754	06/26/03	DR. MEC	DATE 05/09/02	CRAMER PART NUMBER CVP 11-021
F	CONVERTED DIMENSIONS TO METRIC PER ECO#005067	05/24/04	APPD. JDB	DATE 05/13/02	

1 2 3 4 5 6

A

B

C

D

E

F

G

H

I

J