

1

2

3



4

5

6

A

A

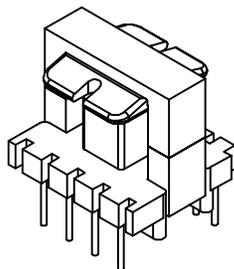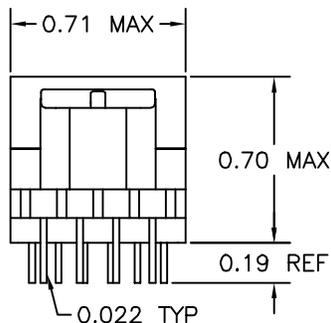


B


B

C

C

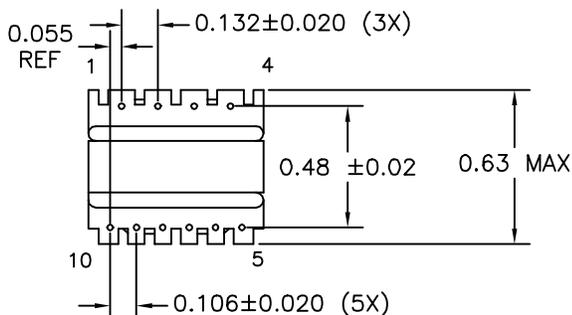

120-400V
@ 60KHZ
50% DC

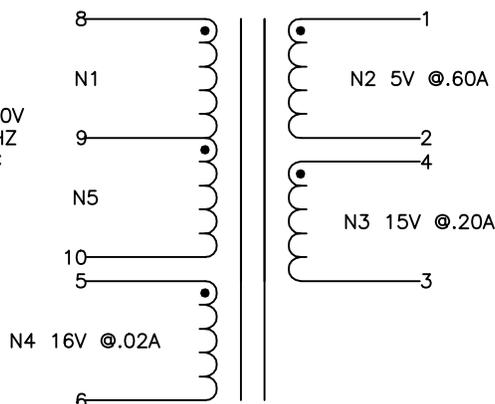

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 60μH MAX
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N5:N2 - 1:0.444

N1/N5:N3 - 1:0.128

N1/N5:N4 - 1:0.139

DCR - OHMS TYP, TOL TBD

N1/N5 - 6.24

N2 - 0.039

N3 - 0.437

N4 - 0.947

HIPOT - 4000VAC 1SEC

N1,N4,N5 TO N2,N3

NOTE:

MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS 544-EIA DATE CODE VP11-023	LOCATION TOP OF CORE	
O	PRELIMINARY	05/09/02	DESCRIPTION 5V & 15V 6VA VIPER 12A XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
A	RELEASED	05/13/02			
B	REMOVED 61558 STANDARD, HEIGHT WAS 0.69 MAX	03/11/03	CUSTOMER		
C	LL WAS 38μH TYP, TOL TBD	06/13/03			
D	UPDATE PIN TO PIN DIMENSIONS	06/30/03			
			G:\DATA\SPECS\ENG\CVP\11-023	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 05/09/02	CRAMER PART NUMBER CVP 11-023
			APPD. JDB	DATE 05/13/02	

1

2

3

4

5

6

J

J