

1

2

3



4

5

6

A

A




B


B

C

C

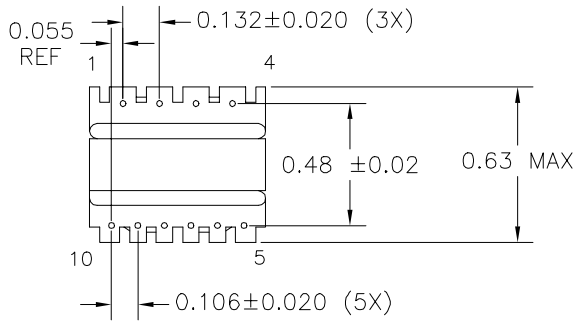

100-390VDC
@ 60KHZ
50%DC

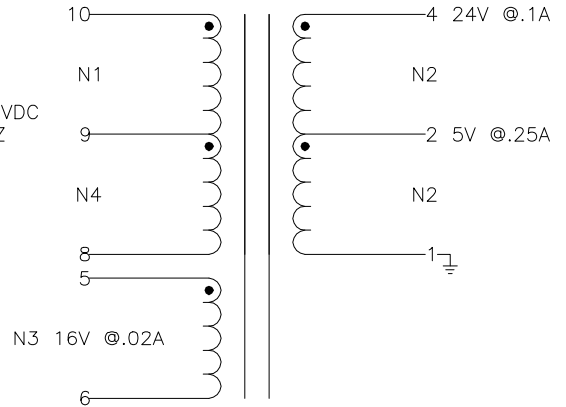

D

D

E

E

ELECTRICAL SPECIFICATION

L @ 1kHz 10mA - (10-8) 3.38mH ±10%

LL @ 100kHz 10mA - (10-8) 64µH MAX
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.24

N1/N4:N3 - 1:0.167

DCR - OHMS TYP, TOL TBD

N1/N4 - 6.41

N2 - 0.354

N3 - 1.18

HIPOT - 2500VAC 1SEC

N1,N3,N4 TO N2

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	05/16/02	544-EIA DATE CODE VP11-025	TOP OF CORE	
B	HEIGHT WAS 0.69 MAX, PIN LENGTH WAS 0.19 REF, LL WAS 39µH TYP	05/05/03	DESCRIPTION 4 VA VIPER 12 FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	UPDATE PIN TO PIN DIMENSIONS	06/30/03	CUSTOMER		
J			G:\DATA\SPECS\ENG\CVP\11-025	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 05/16/02	
			APPD. JDB	DATE 05/20/02	
				CRAMER PART NUMBER CVP 11-025	REV C

1

2

3

4

5

6

J

J