
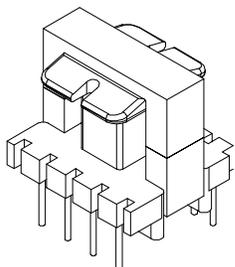




1 2 3 4 5 6

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

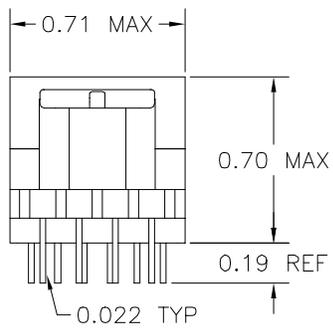

120-400V
@ 60KHZ
50% DC

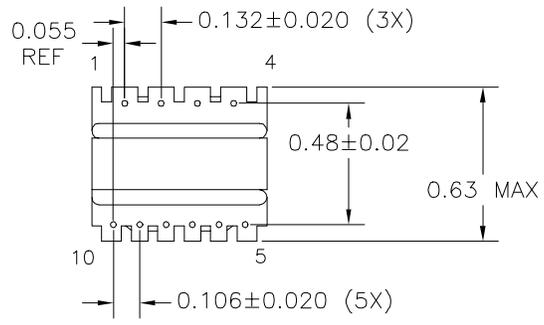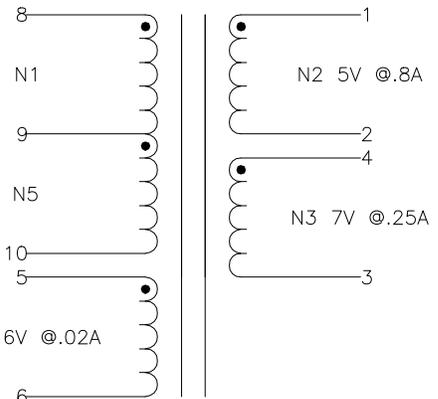

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%
LL @ 100kHz 10mA - (8-10) 42µH TYP, TOL TBD
(WITH 1-6 SHORTED)

URNS RATIO - ±3%
N1/N5:N2 - 1:0.044
N1/N5:N3 - 1:0.056
N1/N5:N4 - 1:0.139

DCR - OHMS TYP, TOL TBD
N1/N5 - 6.01
N2 - 0.026
N3 - 0.109
N4 - 0.868

HIPOT - 5500VAC 1SEC
N1,N4,N5 TO N2,N3

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
IEC 61558-1, 2-17, EN60950

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	08/27/02	544-EIA DATE CODE VP11-029	TOP OF CORE	
B	N3 WAS 5V, & RATIO WAS .044 UPDATED ELECTRICALS	11/01/02	DESCRIPTION 5V & 5V 6VA VIPER 12A TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	UPDATED PIN TO PIN & HEIGHT DIMENSIONS	06/30/03	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-029	CUSTOMER PART NUMBER	REV
			DR. NJW	DATE 08/27/02	CRAMER PART NUMBER CVP 11-029
			APPD. JDB	DATE 08/29/02	

1 2 3 4 5 6