

1

2

3

4

5

6

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H





H

I

I

J

J

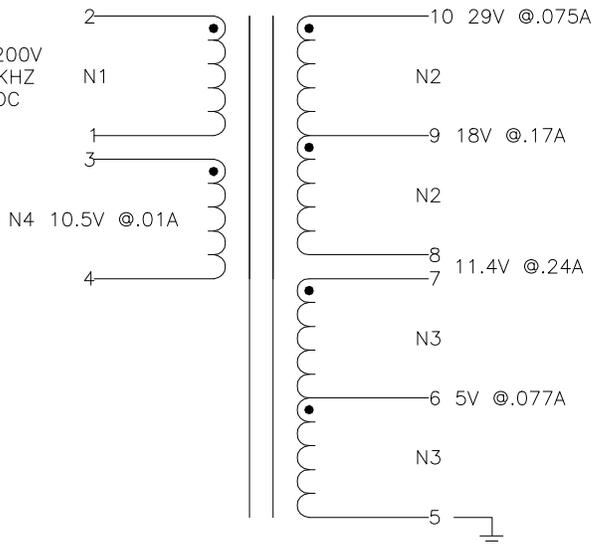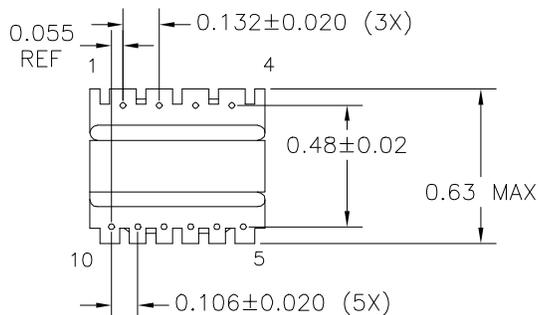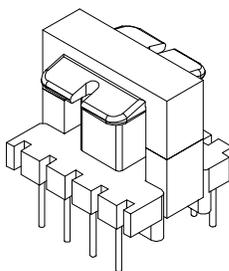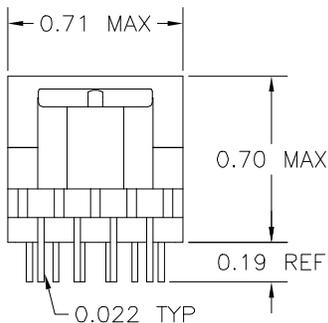

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (2-1) 1.7mH ±10%

LL @ 100kHz 10mA - (2-1) 54µH TYP, TOL TBD
(WITH 3-10 SHORTED)

URNS RATIO - ±3%
N1:N2 - 1:0.177
N1:N3 - 1:0.123
N1:N4 - 1:0.123

DCR - OHMS TYP, TOL TBD
N1 - 1.92
N2 - 0.409
N3 - 0.150
N4 - 0.317

HIPOT - 2500VAC 1SEC
N1,N4 TO N2,N3

8-7 TO BE TIED ON PCB.

NOTE:POLARITY SHOWN IS FOR THE TRANSFORMER. FOR CORRECT FLYBACK OPERATION CONNECT B+ TO PIN 1.

REVISION		DATE	MARKINGS	LOCATION	
0	PRELIMINARY	09/23/02	544-EIA DATE CODE VP11-030	TOP OF CORE	
A	RELEASED	09/26/02	DESCRIPTION H2 FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
B	UPDATED PIN TO PIN & HEIGHT DIMENSIONS	06/30/03	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-030	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 09/23/02	CRAMER PART NUMBER CVP 11-030
			APPD. JDB	DATE 09/26/02	

1

2

3

4

5

6