

1

2

3



4

5

6

A

A

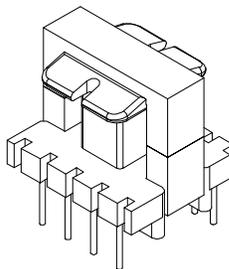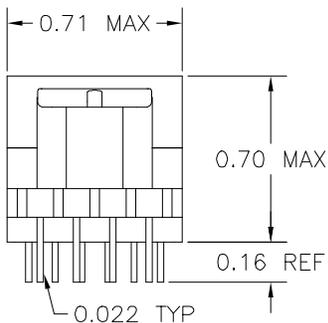


B


B

C

C

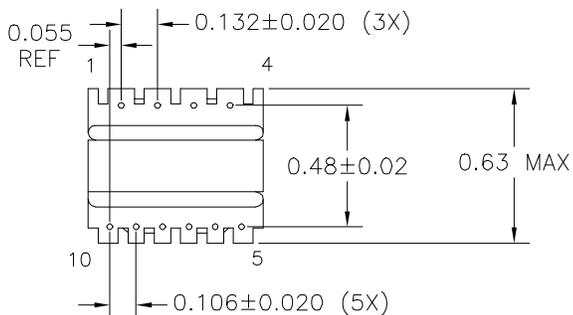

120-400V
@ 60KHZ
50% DC

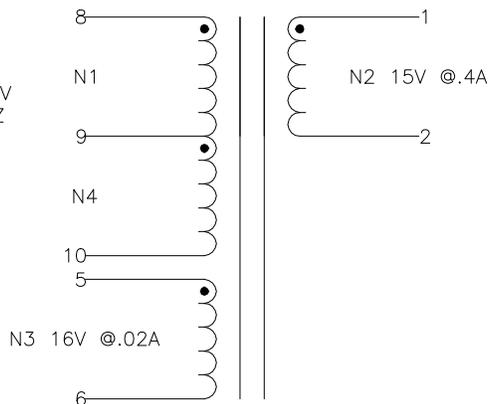

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 60µH MAX
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.133

N1/N4:N3 - 1:0.144

DCR - OHMS TYP, TOL TBD

N1/N4 - 5.98

N2 - 0.147

N3 - 0.910

HIPOT - 4000VAC 1SEC

N1,N3,N4 TO N2

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	03/11/03	544-DATE CODE VP11-034	TOP OF CORE	
B	CHANGED TO CRAMER STANDARD PIN LENGTH WAS 0.19 REF	04/25/03	DESCRIPTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	PROPRIETARY INFORMATION
C	LL WAS 35µH TYP	06/18/03	15V 6VA VIPER 12A XFMR	2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
D	UPDATED PIN TO PIN DIMENSIONS	06/30/03	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-034	CUSTOMER PART NUMBER	REV
			DR. NJW	DATE 03/11/03	
			APPD. JDB	DATE 03/13/03	
				CRAMER PART NUMBER CVP 11-034	REV D

1

2

3

4

5

6

J

J