

1

2

3



4

5

6

A

A




B


B

C

C

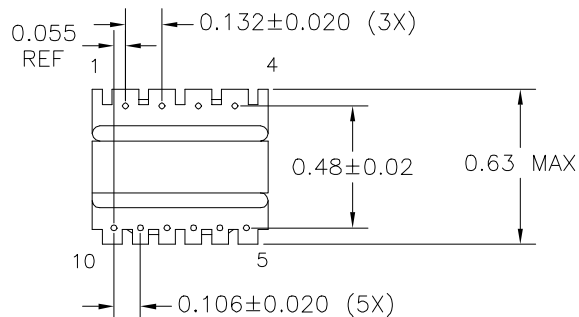

120-400VDC
@60KHZ
50%DC

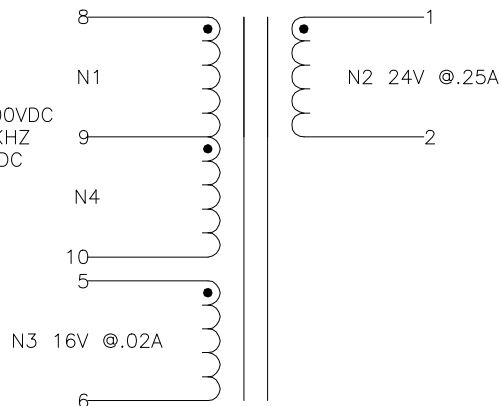

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 60μH MAX
(WITH 1,2,5,6 SHORTED)

URNS RATIO - ±3%
N1/N4:N2 - 1:0.206
N1/N4:N3 - 1:0.133

DCR - OHMS TYP, TOL TBD
N1/N4 - 6.15
N2 - 0.376
N3 - 0.886

HIPOT - 4000VAC 1SEC
N1,N3,N4 TO N2

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	04/03/03	544-DATE CODE VP11-036	TOP OF CORE	
B	CORRECTED VOLTAGES OF N2&N3	04/10/03	DESCRIPTION 24V 6VA VIPER 12A TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	LL WAS 32.7μH TYP	06/18/03	CUSTOMER		
D	UPDATED PIN TO PIN DIMENSIONS	06/25/03			
			G:\DATA\SPECS\ENG\CVP\11-036	CUSTOMER PART NUMBER	REV
			DR. NJW	DATE 04/03/03	CRAMER PART NUMBER CVP 11-036
			APPD. JDB	DATE 04/04/03	

J

J

1

2

3

4

5

6