

1

2

3



4

5

6

A

A

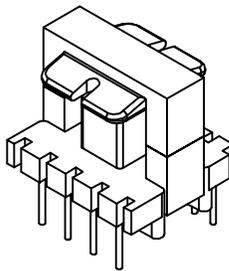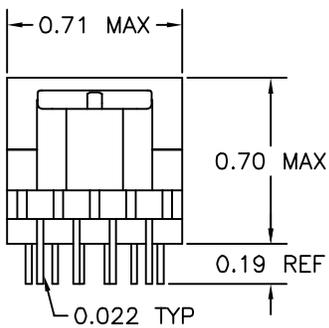


B


B

C

C

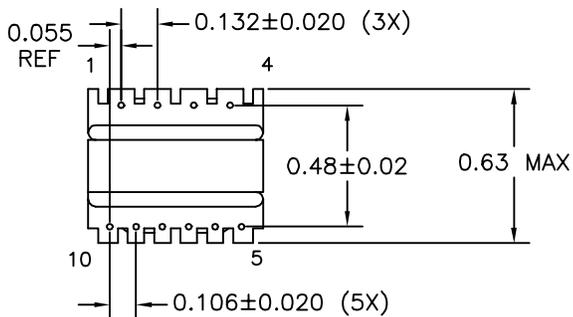

120-400VDC  
@60KHZ  
50%DC

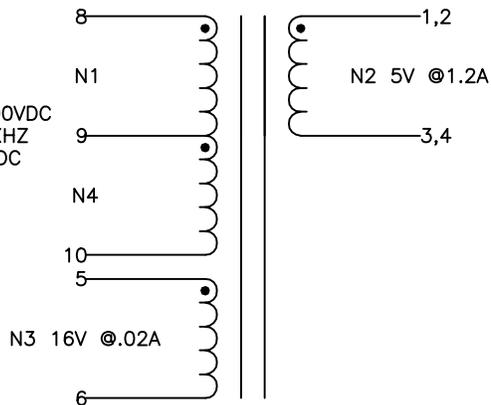

D

D

E

E

**ELECTRICAL SPECIFICATIONS**

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 60µH MAX  
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.044

N1/N4:N3 - 1:0.133

DCR - OHMS MAX

N1/N4 - 7.25

N2 - 0.018

N3 - 1.03

HIPOT - 4000VAC 1SEC

N1,N3,N4 TO N2

NOTE:  
MEETS CONSTRUCTION FOR:  
UL 1310, 1950, 1411  
EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS 544-DATE CODE VP11-037	LOCATION TOP OF CORE	
A	RELEASED	04/03/03	DESCRIPTION 5V 6VA VIPER 12A TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
B	LL WAS 42.8µH TYP	06/18/03			
C	UPDATED PIN TO PIN DIMENSIONS	06/25/03			
D	ASSIGN DCR MAX ECO#005446	09/21/05			
			G:\DATA\SPECS\ENG\CVP\11-037		CUSTOMER PART NUMBER
			DR. NJW	DATE 04/03/03	REV
			APPD. JDB	DATE 04/04/03	CRAMER PART NUMBER CVP 11-037
					REV D



1

2

3

4

5

6

J

J