

1

2

3



4

5

6

A

A

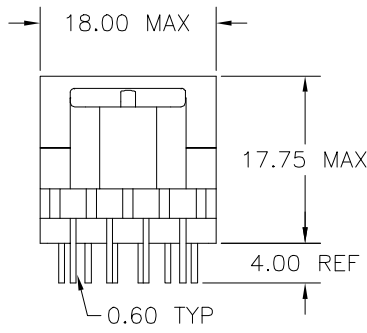


B


B

C

C

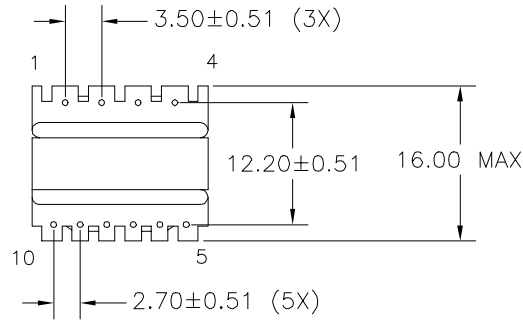

400-700VDC
 @ 60KHZ
 50% DC

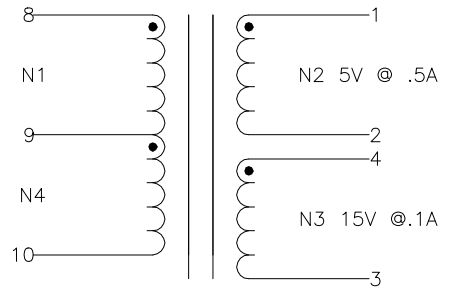

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 25.0µH TYP, TOL TBD
 (WITH 1-4 SHORTED)

URNS RATIO - ±3%
 N1/N4:N2 - 1:0.056
 N1/N4:N3 - 1:0.156

DCR - OHMS TYP, TOL TBD
 N1/N4 - 4.41
 N2 - 0.040
 N3 - 0.708

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	06/23/03	544-DATE CODE VP11-039	TOP OF CORE	
B	UPDATED PIN TO PIN DIMENSIONS	06/25/03	DESCRIPTION 2.5 VA VIPER XFMR, 400-700 INPUT	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	
C	UPDATED L, LL, TURNS RATIO & DCR'S	11/18/03	CUSTOMER		PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
D	UPDATED LL, DCR & TURNS RATIO OF N2	12/11/03			
			G:\DATA\SPECS\ENG\CVP\11-039		CUSTOMER PART NUMBER
			DR. MEC	DATE 06/23/03	REV
			APPD. JDB	DATE 06/24/03	CRAMER PART NUMBER CVP 11-039
					REV D

J

J

1

2

3

4

5

6