

1

2

3


4

5


6

A

A

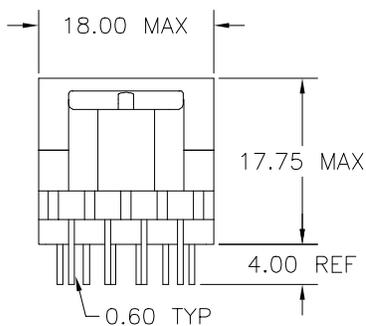

100-390VDC
@ 60KHZ
50% DC

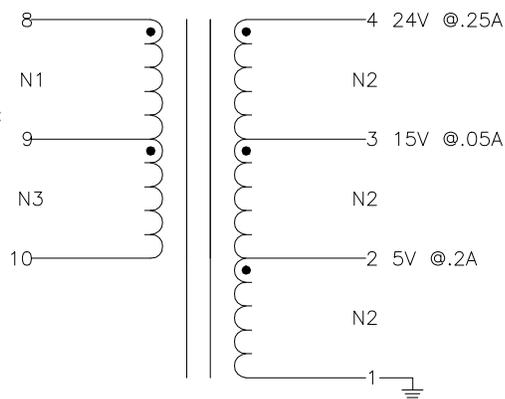


B

B

C

C

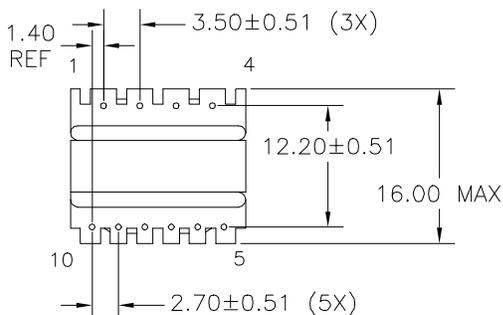

D

D

E

E

F

F

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 5.9mH ±10%

LL @ 100kHz 10mA - (8-10) 54.2µH MAX
(WITH 1-4 SHORTED)

TURNS RATIO - ±3%
N1/N3:N2 - 1:0.195

DCR - OHMS MAX
N1/N3 - 5.80
N2 - 0.472

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	07/29/03	544-DATE CODE VP11-041	TOP OF CORE	
B	ADDED INNER LAYER TAPE, UPDATE LL, DCR'S & CHANGED DIMS TO METRIC	03/02/04	DESCRIPTION 8 VA VIPER 12A XFMR NON ISOLATED	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
C	PILOT REVISIONS (E11041PP) PER ECO#005210	04/11/05	CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-041	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 07/29/03	
			APPD. JDB	DATE 07/30/03	
				CRAMER PART NUMBER CVP 11-041	REV C

J

J

1

2

3

4

5

6