

1

2

3

4

5



6

A

A


B

B

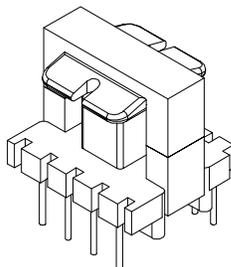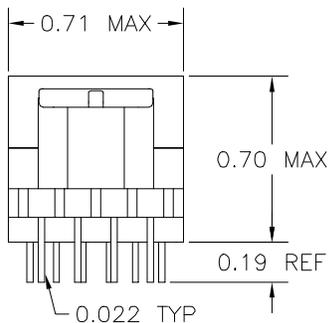


C

C

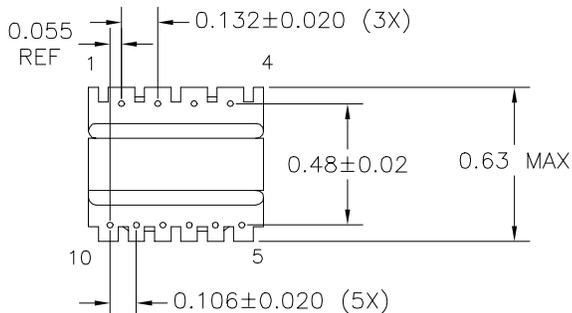

120-400V
 @ 60KHZ
 50% DC

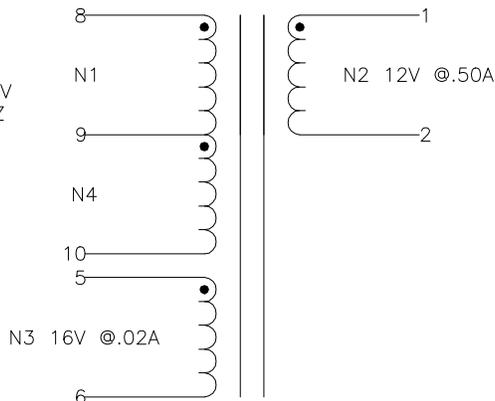

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 61µH TYP, TOL TBD
 (WITH 1-6 SHORTED)

TURN RATIO - ±3%
 N1/N4:N2 - 1:0.106
 N1/N4:N3 - 1:0.144

DCR - OHMS TYP, TOL TBD
 N1/N4 - 6.11
 N2 - 0.101
 N3 - 0.978

HIPOT - 4000VAC 1SEC
 N1,N3,N4 TO N2

NOTE:
 MEETS CONSTRUCTION FOR:
 UL 1310, 1950, 1411
 EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	09/16/03	544-DATE CODE VP11-045	TOP OF CORE	
			DESCRIPTION	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-045		
			DR. MEC	DATE 09/16/03	CUSTOMER PART NUMBER
			APPD. MJA	DATE 09/17/03	REV
				CRAMER PART NUMBER	REV
				CVP 11-045	A

1

2

3

4

5

6

J

J