

1

2

3



4

5

6

A

A

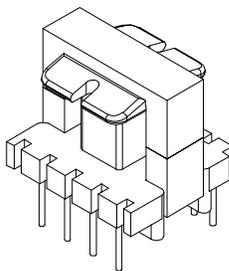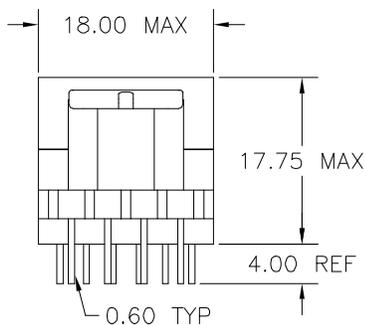


B


B

C

C

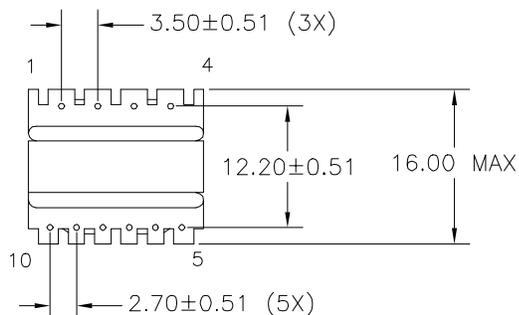

120-400V
@ 60KHZ
50% DC

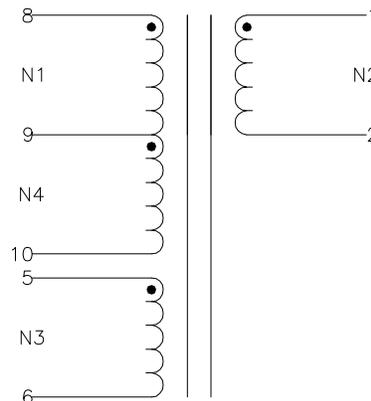

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 39.9µH TYP, TOL TBD
(WITH 1-6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.117

N1/N4:N3 - 1:0.283

DCR - OHMS TYP, TOL TBD

N1/N4 - 6.18

N2 - 0.114

N3 - 1.85

HIPOT - 4000VAC 1SEC

N1,N3,N4 TO N2

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION
A	RELEASED	09/23/03	544-DATE CODE VP11-047	TOP OF CORE
B	N3 RATIO WAS .311, UPDATED LL AND DCR'S	10/10/03	DESCRIPTION 4 LED DRIVER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°
C	CONVERTED DIMENSIONS TO METRIC	04/16/04	CUSTOMER	
			G:\DATA\SPECS\ENG\CVP\11-047	CUSTOMER PART NUMBER
			DR. NJW	DATE 09/23/03
			APPD. MJA	DATE 09/24/03
				CRAMER PART NUMBER CVP 11-047
				REV C

1

2

3

4

5

6

J

J