

1

2

3



4

5


6

A

A

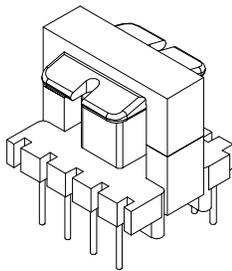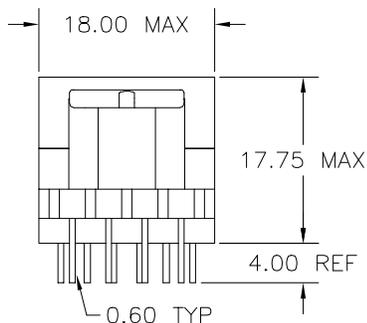

127-204V
@ 60KHZ
50% DC

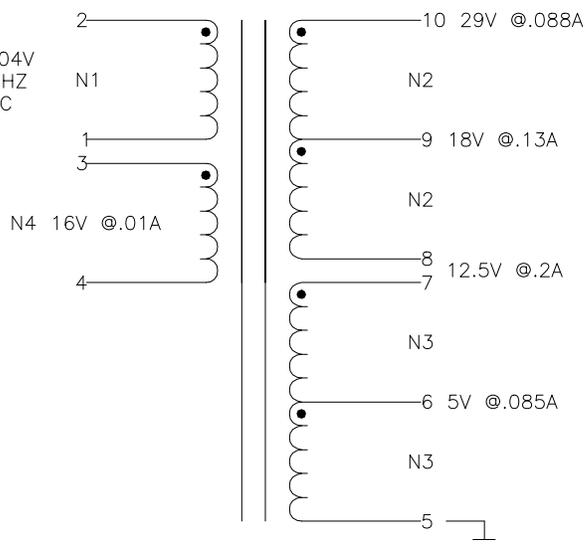


8-7 TO BE TIED ON PCB.

B

B

C

C

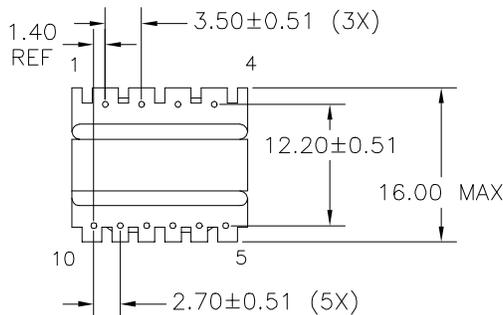

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (2-1) 1.8mH ±10%

LL @ 100kHz 10mA - (2-1) 61µH TYP, TOL TBD
(WITH 3-10 SHORTED)

URNS RATIO - ±3%

N1:N2 - 1:0.162

N1:N3 - 1:0.131

N1:N4 - 1:0.177

DCR - OHMS TYP, TOL TBD

N1 - 1.96

N2 - 0.388

N3 - 0.167

N4 - 0.479

HIPOT - 2500VAC 1SEC

N1,N4 TO N2,N3

NOTE:
POLARITY SHOWN IS FOR THE
TRANSFORMER. FOR CORRECT
FLYBACK OPERATION CONNECT
B+ TO PIN 1.

F

F

G

G

Constructed to UNDERWRITERS LABORATORIES INC. recognized Class 155(F)
electrical insulation system (OBJY2) System C6; File #E110339.

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	11/03/03	544-DATE CODE VP11-048	TOP OF CORE	
B	N2 RATIO WAS 0.292, UPDATED LL & DCR'S, CHANGED DIMENSIONS TO METRIC	11/12/03	DESCRIPTION 4 OUTPUT FLYBACK TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	
			CUSTOMER		PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			G:\DATA\SPECS\ENG\CVP 11-048		CUSTOMER PART NUMBER
			DR. NJW	DATE 11/03/03	REV
			APPD. JDB	DATE 11/05/03	CRAMER PART NUMBER CVP 11-048
					REV B

J

J

1

2

3

4

5

6