
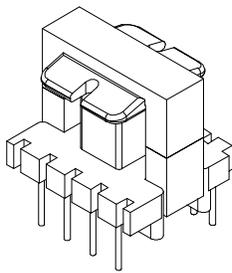



1 2 3 4 5 6

A

A

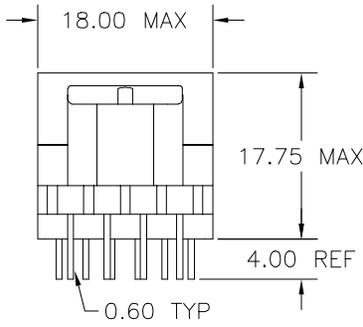

120-400V
@ 60KHZ
50% DC

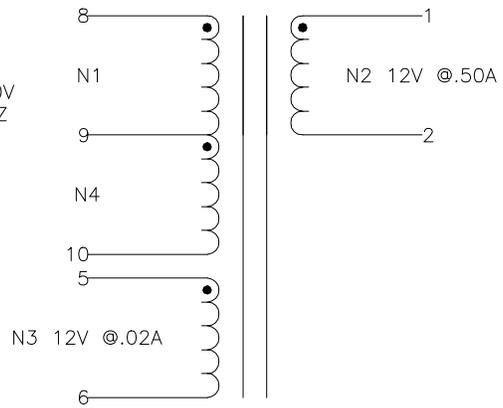


B

B

C

C

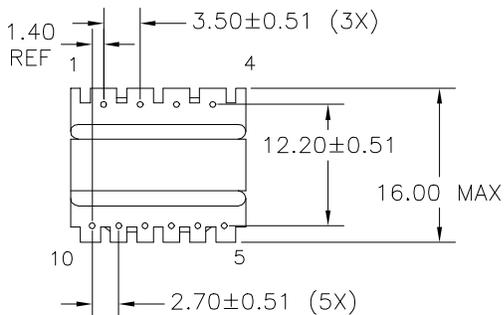

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 41.5µH TYP, TOL TBD
(WITH 1,2,5,6 SHORTED)

URNS RATIO - ±3%
N1/N4:N2 - 1:0.106
N1/N4:N3 - 1:0.106

DCR - OHMS TYP, TOL TBD
N1/N4 - 6.05
N2 - 0.107
N3 - 0.676

HIPOT - 4000VAC 1SEC
N1,N3,N4 TO N2

NOTE:
MEETS CONSTRUCTION FOR:
UL 1310, 1950, 1411
EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	01/15/04	544-DATE CODE VP11-050	TOP OF CORE	
			DESCRIPTION	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-050		
			DR. NJW	DATE 01/15/04	CUSTOMER PART NUMBER
			APPD. MJA	DATE 01/15/04	REV
				CRAMER PART NUMBER	REV
				CVP 11-050	A

1 2 3 4 5 6

J

J