
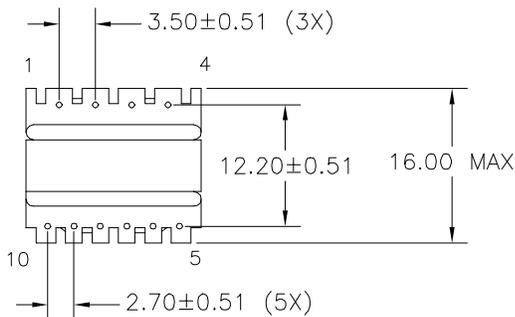


400-700VDC
@ 60KHZ
50% DC

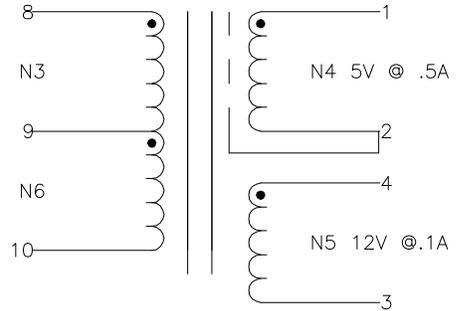

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 30.9µH TYP, TOL TBD
(WITH 1-4 SHORTED)

URNS RATIO - ±3%
8-10:1-2 - 1:0.056
8-10:4-3 - 1:0.128

DCR - OHMS TYP, TOL TBD
8-10 - 4.95
1-2 - 0.044
4-3 - 0.656

| REVISION | | DATE | MARKINGS | LOCATION |
|----------|--|----------|--|---|
| A | RELEASED | 03/24/04 | 544-DATE CODE VP11-052 | TOP OF CORE |
| B | ADDED SHIELDS, UPDATED LL AND DCR'S | 04/06/04 | DESCRIPTION 5,12 VIPER XFMR, 400-700 INPUT | TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2° PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY |
| | | | CUSTOMER | |
| | | | | |
| | | | G:\DATA\SPECS\ENG\CVP\11-052 | CUSTOMER PART NUMBER |
| | | | DR. MEC | DATE 03/24/04 |
| | | | APPD. JDB | DATE 03/25/04 |
| | | | | CRAMER PART NUMBER CVP 11-052 |
| | | | | REV B |