
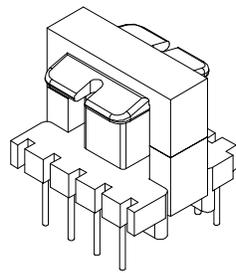




1 2 3 4 5 6

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

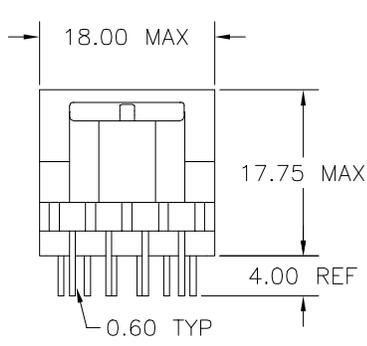

113-205VDC
@ 60KHZ
50% DC

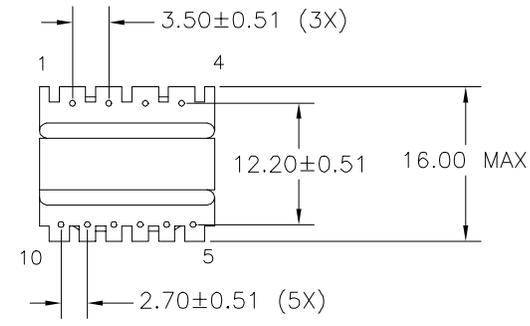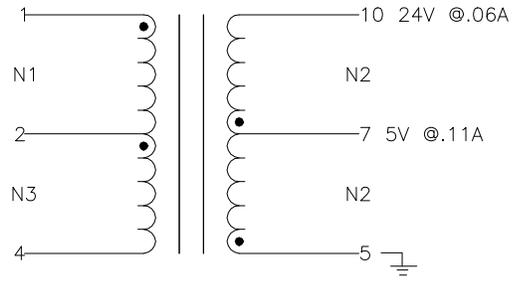

NOTE:
POLARITY SHOWN IS FOR THE
TRANSFORMER. FOR CORRECT
FLYBACK OPERATION CONNECT
B+ TO PIN 1.

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (1-4) 10mH ±10%

LL @ 100kHz 10mA - (1-4) 111.5µH TYP, TOL TBD
(WITH 5-10 SHORTED)

URNS RATIO - ±3%
1-4:5-7 - 1:0.051
1-4:7-10 - 1:0.165

DCR - OHMS TYP, TOL TBD
1-4 - 8.62
5-7 - 0.262
7-10 - 0.877

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	10/18/04	VP11-054 544-DATE CODE	TOP AND SIDE OF CORE	
B	CORRECTED NOTE, ADDED SECONDARY GROUND	10/27/04	DESCRIPTION 2 OUTPUT NON ISOLATED FLYBACK (MF)	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-054	CUSTOMER PART NUMBER	REV
			DR. MEC	DATE 10/18/04	
			APPD. -	DATE -	
				CRAMER PART NUMBER CVP 11-054	REV B

1 2 3 4 5 6