
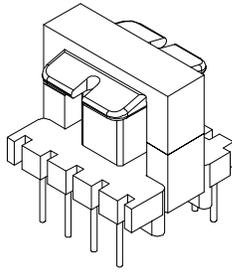



1 2 3 4 5 6

A

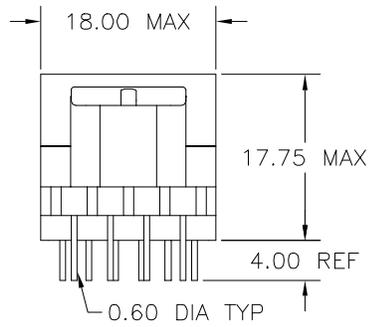


B

C

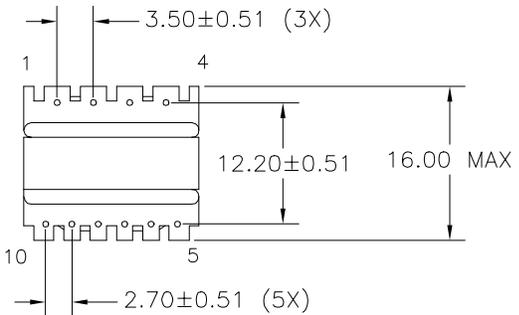

120-430VDC
@60KHZ
50%DC

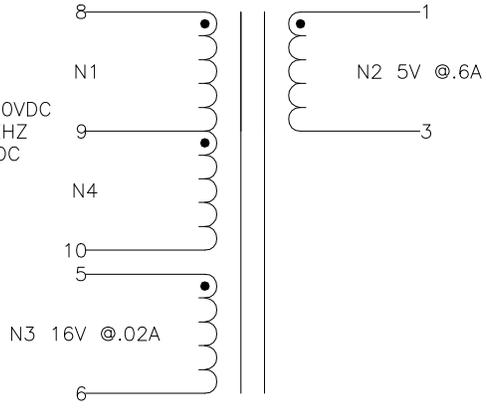

D

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 32.0µH TYP, TOL TBD
(WITH 1,2,5,6 SHORTED)

URNS RATIO - ±3%

N1/N4:N2 - 1:0.044

N1/N4:N3 - 1:0.133

DCR - OHMS TYP, TOL TBD

N1/N4 - 5.56

N2 - 0.026

N3 - 0.775

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	01/11/05	544-DATE CODE VP11-059	TOP OF CORE	
B	N2 FINISH WAS 2	01/18/05	DESCRIPTION 5 VOLT VIPER 12A NON-ISOLATED FLYBACK	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			CUSTOMER		
			G:\DATA\SPECS\ENG\CVP\11-059		CUSTOMER PART NUMBER
			DR. NJW	DATE 01/11/05	REV
			APPD. JDB	DATE 01/17/05	CRAMER PART NUMBER CVP 11-059
					REV B

1 2 3 4 5 6

A

B

C

D

E

F

G

H

I

J