

1

2



3

4

5


6

A

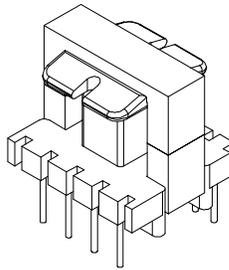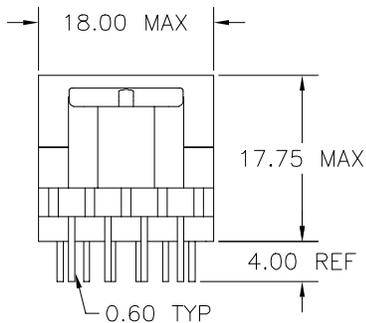


B

C

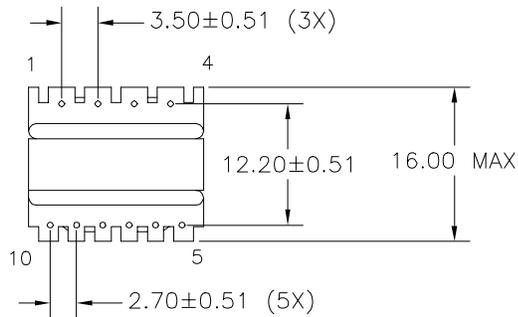

120-400V
 @ 60KHZ
 50% DC

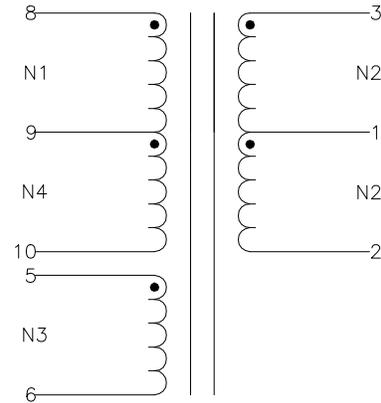

D

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (8-10) 3.25mH ±10%

LL @ 100kHz 10mA - (8-10) 63.2µH MAX
 (WITH 1-6 SHORTED)

URNS RATIO - ±3%

- 8-10:3-1 - 1:0.017
- 8-10:1-2 - 1:0.117
- 8-10:5-6 - 1:0.339

DCR - OHMS MAX

- N1/N4 - 7.39
- N2 - 0.159
- N3 - 2.73

HIPOT - 4000VAC 1SEC

N1,N3,N4 TO N2

NOTE:
 MEETS CONSTRUCTION FOR:
 UL 1310, 1950, 1411
 EN60950

F

G

H

REVISION		DATE	MARKINGS	LOCATION
A	RELEASED	08/22/05	544-DATE CODE VP11-064	TOP OF CORE
B	ADDED 3T WINDING 3-1	10/06/05	DESCRIPTION 4 LED DRIVER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°
C	ASSIGN LL AND DCR TOLERANCES	05/30/06	CUSTOMER	
			G:\DATA\SPECS\ENG\CVP\11-064	CUSTOMER PART NUMBER
			DR. MEC	DATE 08/22/05
			APPD. JDB	DATE 08/23/05
				CRAMER PART NUMBER CVP 11-064
				REV C

1

2

3

4

5

6

J

J