

1

2



3

4

5

6

A

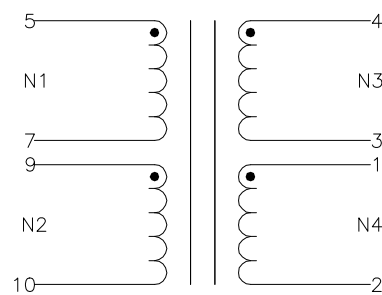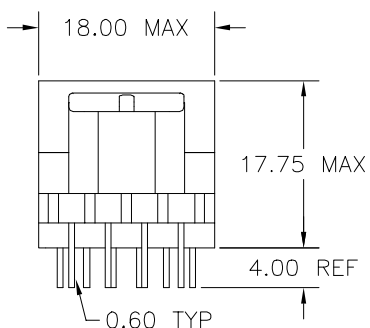


A

B

B

C

C

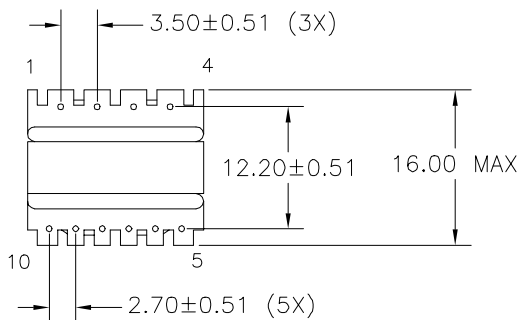

D

D

E

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (5-7) ? ±10%

LL @ 100kHz 10mA - (5-7) 1.8µH TYP, TOL TBD (WITH 1-4,9,10 SHORTED)

URNS RATIO - ±3%

- N1:N2 - 1:0.88
- N1:N3 - 1:0.72
- N1:N4 - 1:0.32

DCR - OHMS TYP, TOL TBD

- N1 - 0.113
- N2 - 0.113
- N3 - 0.105
- N4 - 0.051

HIPOT - ?

N1,N2 TO N3,N4

F

F

G

G

H

H

REVISION		DATE	MARKINGS	LOCATION	
A	RELEASED	12/13/05	544-DATE CODE VP11-066	ON TOP OF CORE	
			DESCRIPTION L6565 FLYBACK	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	
			CUSTOMER		PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			G:\DATA\SPECS\ENG\CVP\11-066		CUSTOMER PART NUMBER
			DR. MEC	DATE 12/13/05	REV
			APPD. -	DATE -	CRAMER PART NUMBER CVP 11-066
					REV A

1

2

3

4

5

6

J

J