




1 2 3 4 5 6

A

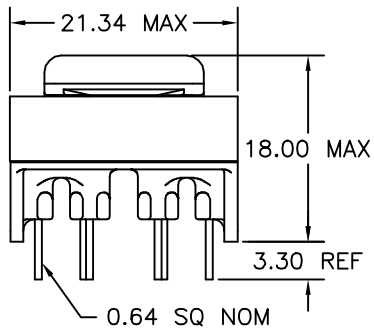


B

C

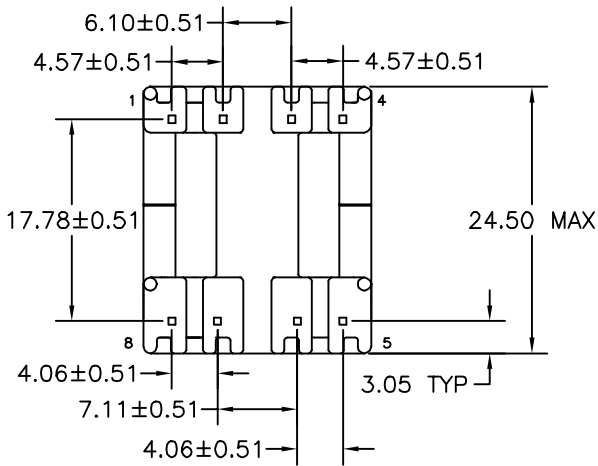

100-400V  
@ 60KHZ  
50%DC

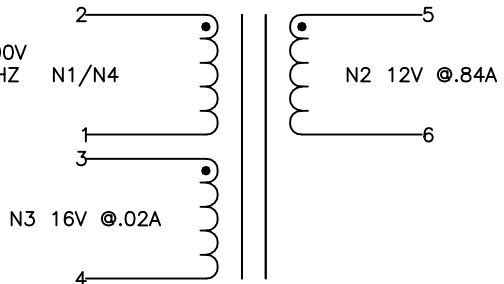

D

E

NOTE:  
POLARITY SHOWN IS FOR THE  
TRANSFORMER. FOR CORRECT  
FLYBACK OPERATION CONNECT  
B+ TO PIN 1.

**ELECTRICAL SPECIFICATIONS**

L @ 1kHz 10mA - (2-1) 2.25mH ±15%

LL @ 100kHz 10mA - (2-1) 39.4µH MAX  
(WITH 3-6 SHORTED)

URNS RATIO - ±3%  
N1/N4:N2 - 1:0.127  
N1/N4:N3 - 1:0.167

DCR - OHMS MAX  
N1/N4 - 3.30  
N2 - 0.091  
N3 - 1.42

HIPOT - 5500VAC 1SEC  
N1,N3,N4 TO N2

NOTE:  
MEETS CONSTRUCTION FOR:  
UL 1310, 1950, 1411  
EN60950

F

G

H

REVISION		DATE	MARKINGS CRAMER EIA DATE CODE CVP 32-001	LOCATION PIN RAIL SIDE OF CORE		
B	UPDATED LL & DCR'S CORRECTED HIPOT	08/05/02	DESCRIPTION 12V, 10VA VIPER 22 TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY	
C	L WAS 1.19mH, UPDATE DCR'S	08/14/02				
D	BACK TO VERSION A	10/25/02	CUSTOMER			
E	UPDATED ELECTRICALS	03/14/03				
F	UPDATED DESCRIPTION WAS 12VA	03/24/03				
G	CONVERT DIMENSIONS TO METRIC	05/12/06	G:\DATA\SPECS\ENG\CVP\32-001	CUSTOMER PART NUMBER	REV	
H	UPDATED CONSTRUCTION NOTE	06/26/06	DR. NJW APPD. JDB	DATE 07/12/02 DATE 07/16/02	CRAMER PART NUMBER CVP 32-001	REV H

1 2 3 4 5 6

A

B

C

D

E

F

G

H

I

J