

1

2

3



4

5

6

A

A

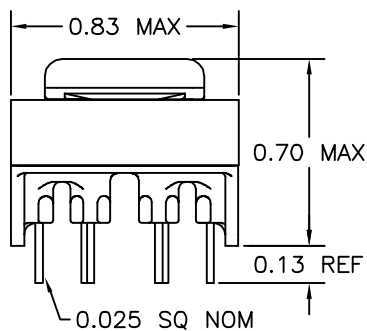


B


B

C

C

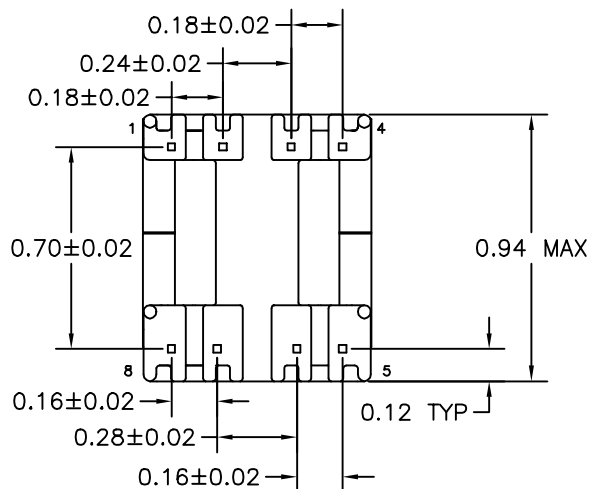

100-400V  
@ 60KHZ  
50%DC

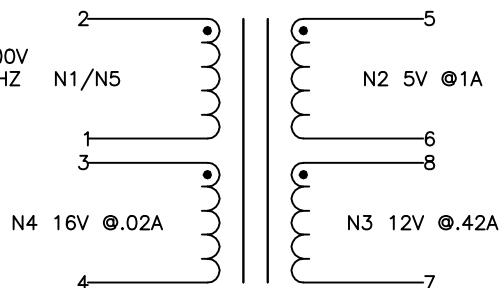

NOTE:  
POLARITY SHOWN IS FOR THE  
TRANSFORMER. FOR CORRECT  
FLYBACK OPERATION CONNECT  
B+ TO PIN 1.

D

D

E

E

#### ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (2-1) 2.25mH ±15%

LL @ 100kHz 10mA - (2-1) 22μH TYP, TOL TBD  
(WITH 3-8 SHORTED)

URNS RATIO - ±3%

N1/N5:N2 - 1:0.053

N1/N5:N3 - 1:0.127

N1/N5:N4 - 1:0.167

DCR - OHMS TYP, TOL TBD

N1/N5 - 2.91

N2 - 0.032

N3 - 0.126

N4 - 1.28

HIPOT - 5500VAC 1SEC

N1,N4,N5 TO N2,N3

NOTE:  
MEETS CONSTRUCTION FOR:  
UL 1310, 1950, 1411  
IEC 61558-1, 2-17, EN60950

F

F

G

G

H

H

REVISION		DATE	MARKINGS CRAMER EIA DATE CODE CVP 32-002	LOCATION PIN RAIL SIDE OF CORE	
O	PRELIMINARY	07/12/02			
A	RELEASED	07/16/02	DESCRIPTION 5V, 12V, 10VA VIPER 22 TRANSFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
B	UPDATED LL & DCR'S	08/05/02	CUSTOMER		
C	L WAS 1.19mH, UPDATED LL AND DCR'S	08/14/02			
D	BACK TO VERSION A	09/20/02			
E	L WAS 1.19mH, RATIOS WERE N2-.055, N3-.128, N4-.174, UPDATED LL AND DCR'S	03/26/03	G:\DATA\SPECS\ENG\CVP\32-002	CUSTOMER PART NUMBER	REV
			DR. NJW	DATE 07/12/02	CRAMER PART NUMBER
			APPD. JDB	DATE 07/16/02	CVP 32-002
					REV E

1

2

3

4

5

6

J

J