



1 2 3 4 5 6


A

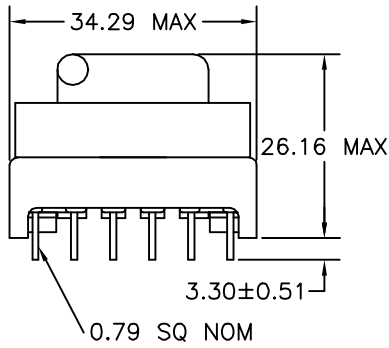

B

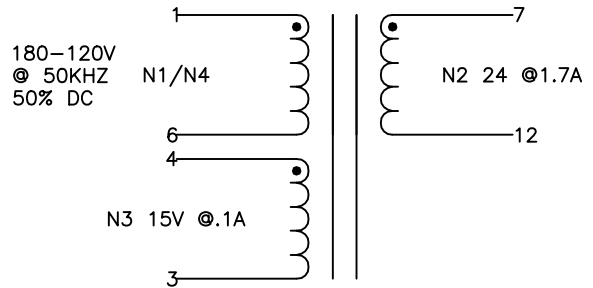

C

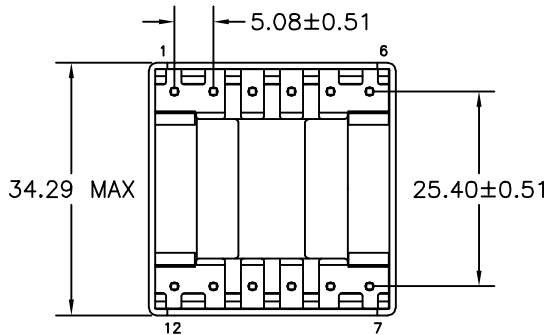

D

E

ELECTRICAL SPECIFICATIONS

L @ 1kHz 10mA - (1-6) 1.4mH ±10%

LL @ 100kHz 10mA - (1-6) 12.0µH TYP, TOL TBD
(WITH 3,4,7,12 SHORTED)

URNS RATIO - ±3%
1-6:4-3 - 1:0.092
1-6:7-12 - 1:0.158

DCR - OHMS TYP, TOL TBD
1-6 - 2.60
4-3 - 0.262
7-12 - 0.041

HIPOT - 4000VAC 1SEC
1-6 TO 7-12

F

G

H

REVISION		DATE	MARKINGS	LOCATION
A	RELEASED	07/19/04	CRAMER DATE CODE CVP 45-012	PIN RAIL SIDE OF CORE
B	L WAS 4.4mH, 7-12 RATIO WAS 0.142, UPDATED ELECTRICALS	08/23/04	DESCRIPTION HIGH VOLTAGE INPUT FLYBACK TRAMFORMER	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°
			CUSTOMER	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			DR. NJW	DATE 07/19/04
			APPD. JDB	DATE 07/20/04
			CUSTOMER PART NUMBER	REV
			CRAMER PART NUMBER CVP 45-012	REV B

I

J

1 2 3 4 5 6